

MAXHUB XBoard V7 Series

Experience the ultimate in video conferencing and collaboration with the MAXHUB XBoard V7 series.

Powered by a Windows PC module, this all-in-one design device seamlessly integrates an intelligent triple camera, cutting-edge audio processing, interactive whiteboarding, and an intuitive meeting launcher, all housed within a single comprehensive collaboration display. This powerful combination enhances the dynamism of meetings and introduces a flexible and creative interaction to your organization.



Professional 4K Display

High color accuracy, $\Delta E \leq 1.5$
Wide color gamut, NTSC 90%
Non-glare technology, 25% haze




Precise Touch

Intelligent Touchscreen Technology
Revolutionary writing experience,
Windows Ink supported



BYOM Anytime

Embrace seamless efficiency
enabled by MAXHUB Share
App or wireless dongle




Smart Whiteboard

Direct annotation
Real-time collaboration




Get Spatial with Sound

16-mic array, 15 meters pick-up
range. Multiple AI-enhanced
audio algorithms




Built-in Speaker

2 x 10W + 20W speaker
2.1 sound channel

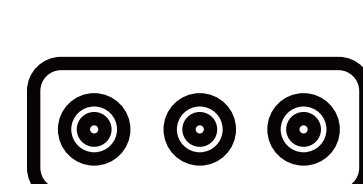

Trident Lens System

50 MP+50 MP+50 MP cameras
5x hybrid zoom, 99° ultra-wide FOV



Peak Performance

Unleash the power with MT71 series
PC module. 12th Gen Intel Processor
with Windows system, stably smooth

Display				
Model	V5550	V6550	V7550	V8650
Screen Size (Inch)	55	65	75	86
Aspect Ratio	16:9	16:9	16:9	16:9
Panel	ADS	VA	VA	IPS
Backlight	DLED	DLED	DLED	DLED
Brightness (Typ.)	350 nits	350 nits	350 nits	350 nits
Glass	Zero parallax	Zero parallax	Zero parallax	Zero parallax
	3mm thickness	3mm thickness	3mm thickness	3mm thickness
	9H tempered	9H tempered	9H tempered	9H tempered
Surface Technology	25% haze	25% haze	25% haze	25% haze
	Non-glare technology	Non-glare technology	Non-glare technology	Non-glare technology
Resolution	3840 × 2160	3840 × 2160	3840 × 2160	3840 × 2160
Refresh Rate	60 Hz	60 Hz	60 Hz	60 Hz
Contrast Ratio	1200:1 (typ.)	5000:1 (typ.)	5000:1 (typ.)	1200:1 (typ.)
Viewing Angle (H × V)	178° / 178°	178° / 178°	178° / 178°	178° / 178°
Color Gamut	90% NTSC	90% NTSC	90% NTSC	90% NTSC
Display Orientation	Landscape	Landscape	Landscape	Landscape
Response Time	8 ms	6.5 ms	6.5 ms	8 ms
Life Time	>50,000 hours	>50,000 hours	>50,000 hours	>50,000 hours
Operation Hours (Hours / Day)	16 / 7	16 / 7	16 / 7	16 / 7
Display Color	1.07B (10 bit)	1.07B (10 bit)	1.07B (10 bit)	1.07B (10 bit)
Color Accuracy	Delta E ≤ 1.5	Delta E ≤ 1.5	Delta E ≤ 1.5	Delta E ≤ 1.5
Sensor	Ambient light sensor	Ambient light sensor	Ambient light sensor	Ambient light sensor
	Ultrasonic detection sensor	Ultrasonic detection sensor	Ultrasonic detection sensor	Ultrasonic detection sensor
Pixel Pitch	0.315(H) × 0.315(V) mm	0.372(H) × 0.372(V) mm	0.42975(H) × 0.42975(V) mm	0.4935(H) × 0.4935(V) mm
Display Area	1209.6(H) × 680.4(V) mm	1428.48(H) × 803.52(V) mm	1650.24(H) × 928.26(V) mm	1895.04(H) × 1065.96(V) mm

Touch System	
Touch Technology	Intelligent Touchscreen Technology (infrared recognition)
Touch Point	50 points touch
Object Recognition Range	≥1.5 mm
Accuracy	±0.5 mm
Response Time	≤2.5 ms
Writing Height	≤1 mm
System (Touch Return)	Windows11/Windows10/Windows8/Windows7/Android/Linux/Mac OS X/Chrome OS
Feature	Windows Ink / Direct Annotation / Palm Rejection / Sharp Erase Multi-input Recognition / Handwriting Recognition

Connectivity	
I/O Ports (Interactive Display)	
HDMI IN × 2	Up to 4K@60Hz, HDCP 2.2, CEC
USB 2.0 × 1	For system upgrades
USB 3.0 × 2	For external peripherals
USB Type-C IN × 1	USB 2.0, supports DP 1.2 input, wireless dongle pairing, and BYOD
TOUCH 2.0 × 1	USB 2.0 Type B
AUDIO IN × 1	3.5mm Jack
AUDIO OUT × 1	3.5mm Jack
RS232 × 1	Baud rate 9600
RJ45 IN × 1	Mic in, supports 30W POE, microphone cascade, AES67 protocol
I/O Ports (MT71S/MT71P PC Module)	
HDMI OUT × 1	Up to 4K@30Hz
USB 2.0 × 3	For external peripherals
USB 3.0 × 3	For external peripherals
RJ45 IN × 1	10M/100M/1000Mbps
MIC IN × 1	3.5 mm Jack, input for microphone
PC Module Slot	Module slot × 1
PC Module System	Windows10 IOT (64bit)
Wi-Fi Slot	Module slot × 1
Wi-Fi (MT71S/MT71P PC Module)	Wi-Fi 6 supported 802.11ax, 2.4GHz/5GHz
Bluetooth (MT71S/MT71P PC Module)	5.2

Camera				
Quantity	3			
Resolution	50 MP + 50 MP + 50 MP (Panorama + Telephoto + Telephoto)			
Zoom	2x optical zoom			
	5x digital zoom			
Field of View	99° (Diagonal)			
	86° (Horizontal)			
	69° (Vertical)			
Position	Built-in ejection			
Feature	Personalized presets			
	Auto framing			
	Speaker tracking			
	Multiple-speaker tracking			
	Intelligent focus			

Audio				
Sound Channel	2.1			
Speaker Power	2 × 10W + 20W			

Microphone				
Quantity	16-mic array			
Pick-up Angle	180°			
Pick-up Range	0~15m			
Feature	Intelligent audio fence			
	AI spatial sound			
	AEC (Auto echo cancellation)			
	ANC (AI noise cancellation)			
	AGC (Auto gain control)			

Feature				
System OS	MAXHUB OS 7.0 powered by Windows			
Screen Share	MAXHUB Share			
	Support BYOM / Miracast / Airplay / Chromecast / P2P			
Device Management	MAXHUB Pivot			
Protocol Control	RS232 / IP control			
	Supports integration with Crestron / Extron / Q-sys			
Special Features	Microsoft Intune			

Accessory				
Power Cord	3m × 1	3m × 1	3m × 1	3m × 1
HDMI Cable	1.5m × 1	1.5m × 1	1.5m × 1	1.5m × 1
Stylus	× 2	× 2	× 2	× 2
Wall Mount	WIB6540A	WIB9060H	WIB9060H	WIB9060H
Wireless Adapter	SI07B	SI07B	SI07B	SI07B

Physical Specification				
Dimension (W × H × D)	1269.5 × 792.9 × 102.7 mm	1488 × 914 × 91 mm	1709.4 × 1040.3 × 90 mm	1957 × 1180.1 × 103 mm
Shipping Dimension (W × H × D)	1372 × 875 × 187 mm	1628 × 1005 × 208 mm	1863 × 1140 × 225 mm	2110 × 1283 × 225 mm
Thickness of machine and wall mount	130.5 mm	117 mm	117 mm	130 mm
Wall-hanging Screw Spec	M8 × 25 mm	M8 × 25 mm	M8 × 25 mm	M8 × 25 mm
VESA	400 × 200 mm	600 × 400 mm	800 × 400 mm	800 × 400 mm
Net Weight	26.85 Kg	36.55 Kg	48.45 Kg	59.95 Kg
Gross Weight	32.25 Kg	45.60 Kg	61.10 Kg	74.55 Kg

Environmental Conditions	
Operating Temperature	0°C~40°C
Storage Temperature	-20°C~60°C
Operating Humidity	10%~90%RH
Storage Humidity	10%~90%RH
Altitude	Below 5000 meters

Power				
Power Supply	100-240V~ 50/60Hz 3.5A	100-240V~ 50/60Hz 4.0A	100-240V~ 50/60Hz 4.0A	100-240V~ 50/60Hz 5.0A
Standby Power	≤ 0.5 W	≤ 0.5 W	≤ 0.5 W	≤ 0.5 W
Power Consumption (Typ.)	125 W	180 W	195 W	275 W
Power Consumption (Max.)	320 W	375 W	390 W	465 W

Certification	
Safety	IEC 62368-1
EMC	Class B
Environment	Energy Star
IP Rating	IP5X design standards

Warranty	
3 years warranty	

Optional Module	
Pluggable PC Module	MT71S / MT71P
Mobile Stand	ST41B / ST23C
Wireless Dongle	WT13



MT71S / MT71P



ST41B



ST23C



WT13

Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance.Should the above-mentioned change in the document become necessary, the document may be updated without written notice.